Bearer wipers

A compact, fully adaptable design

They keep the cylinder bearers constantly lubricated. Magnetic base, compact design and adjustable rod for tool-free positioning inside the frame.



43 mm

HEIGHT OF THE ASSEMBLY

200 mm

ROD, ADAPTABLE

01

Adjust the position of the reservoir on the rod, at the required distance from the frame.

02


Fill the reservoir with lubricant.

03

Mount the assembly on the press, resting the magnetic base on the frame.

CONVERTING EQUIPMENT

A compact, fully adaptable design

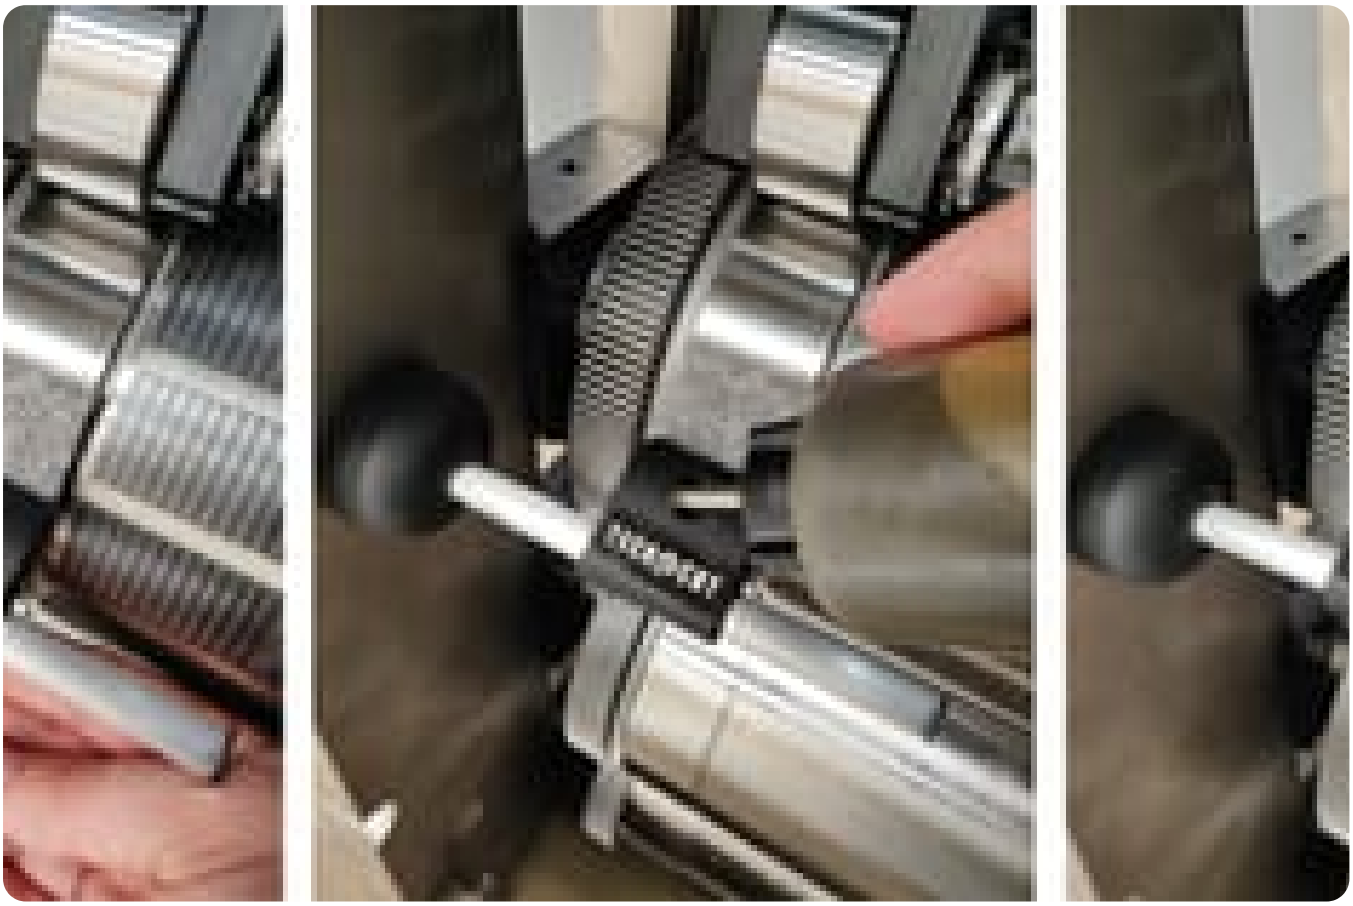

ADVANTAGES

Looking after the die pays off

01

Constant maintenance

They are in permanent contact with the cylinder bearers.

02

Easy positioning

The magnetic base goes onto the frame quickly, at the desired distance.

03

Savings

It extends the service life of the cylinders and reduces repair costs.

04

Versatility

They can be reused on different stations as needed.

NEXT STEP

How many do you need?

Tell us the type of station and the distance to the frame. We will confirm size, quantity and lead time, and adapt the rod length if necessary.

TECNOCUT · BARCELONA

Rambla Solanes, 21
08940 Cornellà de Llobregat
+34 93 261 05 83
tecnocut@tecnocut.com
www.tecnocut.com